



INSTALLATION INSTRUCTIONS FIREPLACE INSERT CUSTOM SURROUNDS

FOR USE ONLY WITH DV(L)(25,33,35)IN & VF(L,P)(20,28)IN SERIES FIREPLACE INSERTS
(SEE PAGES 2-5)




3-SIDED SURROUND




4-SIDED SURROUND

FOR USE ONLY WITH DX(L,T)(30,35)IN SERIES FIREPLACE INSERTS
(SEE PAGE 6)




3-SIDED SURROUND




4-SIDED SURROUND

FOR USE ONLY WITH DVC(20,26,28)IN SERIES FIREPLACE INSERTS
(SEE PAGE 7)



3-SIDED SURROUND



4-SIDED SURROUND

Caution: Sharp Edges

NOTE: These instructions apply to DV(L)(25,33,35)IN, VF(L,P)(20,28)IN and DX(L,T)(30,35)IN of Fireplace Insert when installing custom surrounds.

NOTE: The Fireplace Insert must be installed into the fireplace cavity with all venting, gas and electrical connections completed before installing the Custom Surround.

NOTE: If the Fireplace Insert includes standard louvers, remove them prior to installation of the Custom Surround.

DV(L)(25,33,35)IN AND VF(L,P)(20,28)IN SERIES FIREPLACE INSERTS

1. Place custom surround against wall and fireplace as shown in Figure 1.

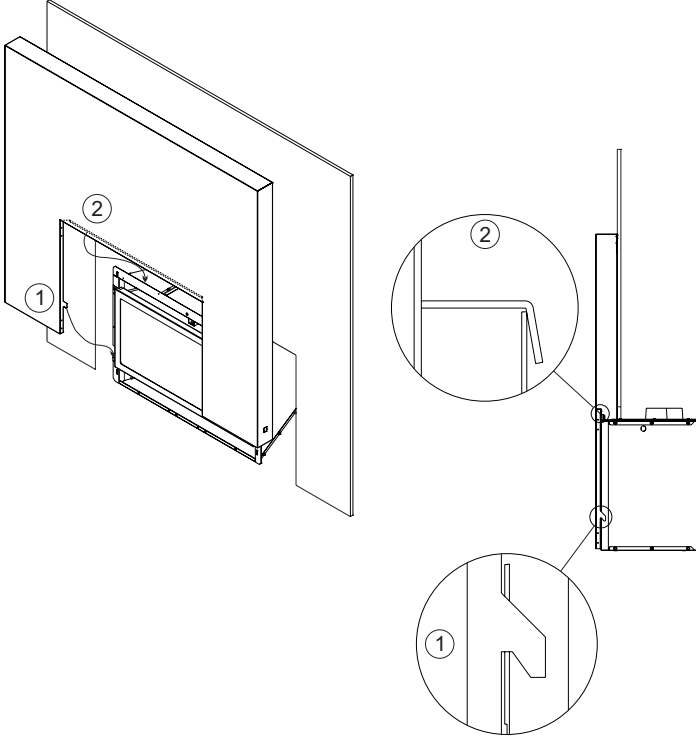


Figure 1

2. Lightly mark the wall on the at the center. Remove the surround. See Figure 2.

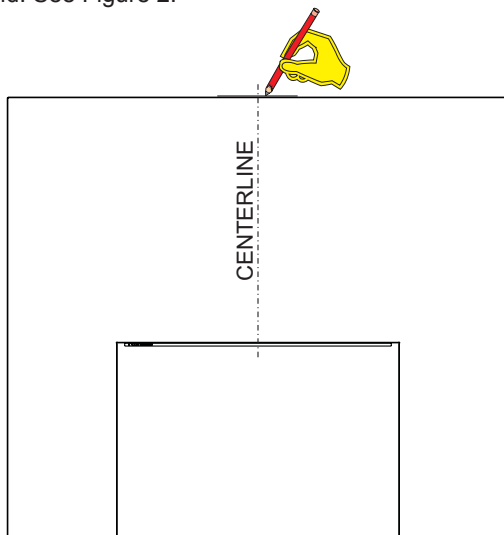


Figure 2

3. Measure 2-3/4" down from the mark made in step 2 and make a new mark. See Figure 3.

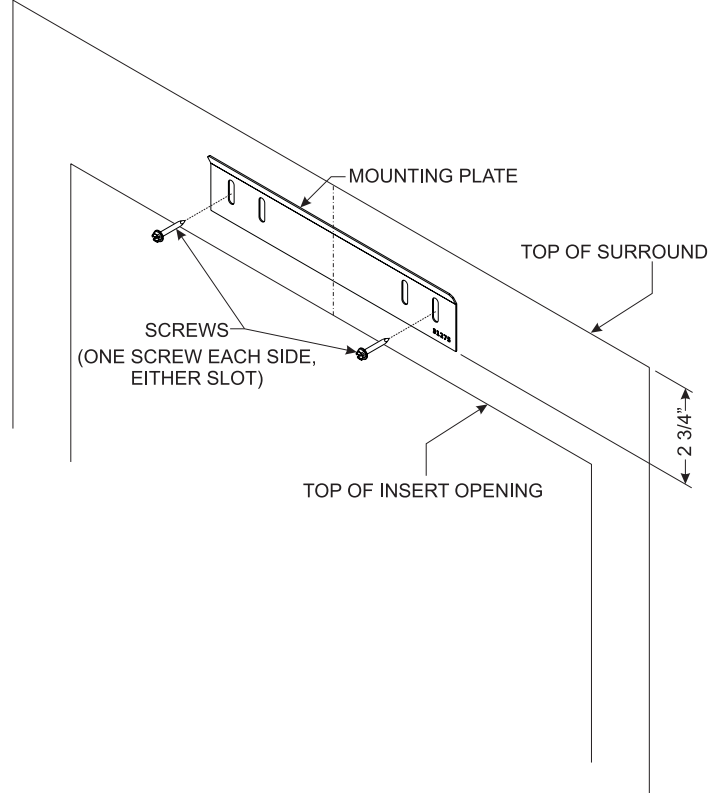


Figure 3

4. Line up bottom of mounting plate with mark made in Step 3. Install the mounting plate to the wall with the two screws provided. Ensure the mounting plate is level. One screw must be placed on each side of the mounting plate, but either slot may be used.
- 4a. Install a Door or Front Kit. A Door or Front Kit is **required** on DVL(25,33)IN models and is optional on DV(25,33,35)IN Models. See installation instructions included with the door or front kit.

DV(L)(25,33,35)IN AND VF(L,P)(20,28)IN SERIES FIREPLACE INSERTS

5. Install the Surround by placing the top surround flange over the mounting bracket and the middle surround flange over the top flange of the insert. Center the surround left to right, then swing the legs of the surround inward. Lift each surround leg slightly so that the lower retaining hooks engage the notched out areas in the insert side flanges. The top flange of the surround will hook behind the top flange of the mounting plate.


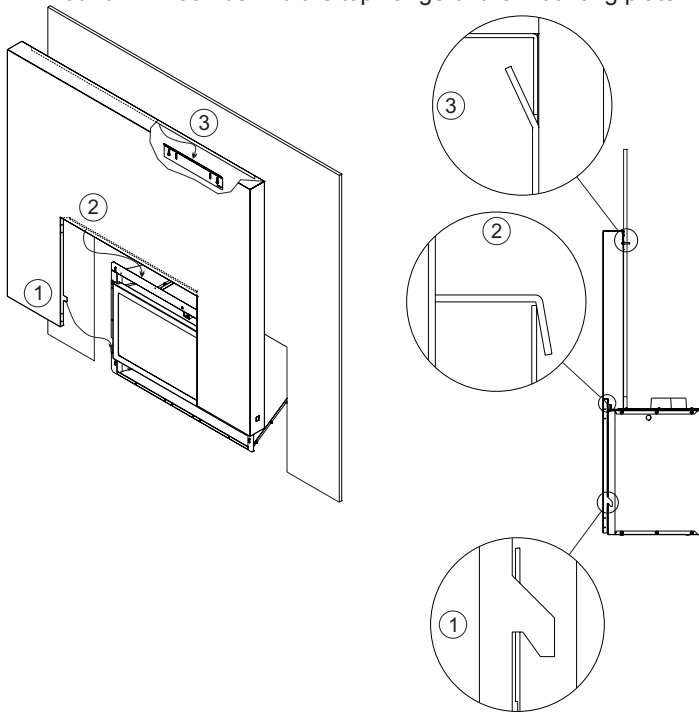


Figure 4

6. The Surround kit includes a bottom panel that replaces a standard lower louver assembly. If an operable door kit is to be installed, attach the magnet door catch to the bottom panel with two #6 x 3/8" screws. **See Figure 5.**

NOTE:
3-SIDED CUSTOM SURROUND SHOWN

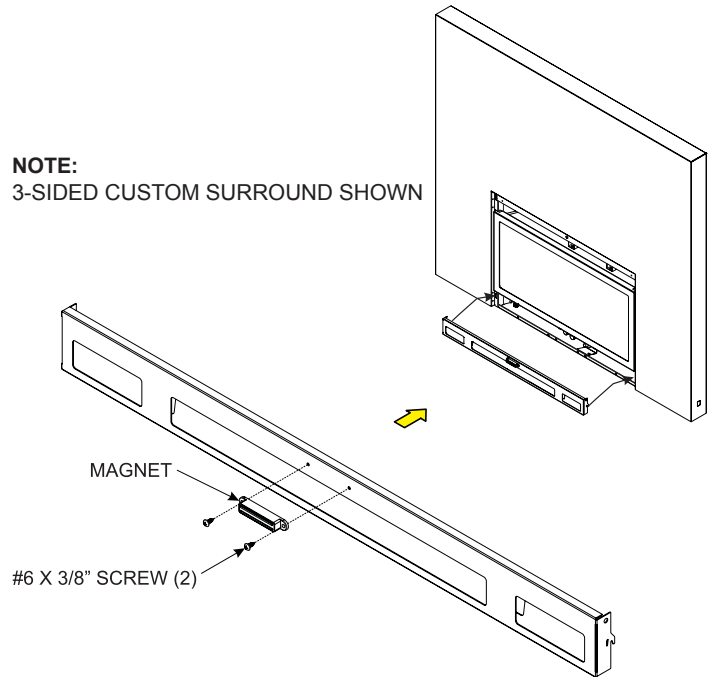


FOR USE WITH OPTIONAL DOOR KITS
DIRECT VENT ONLY

Figure 5


Decorative door kits for direct-vent fireplace inserts and fronts are available for purchase through your Empire Dealer. A Door or Front Kit is **required** on DVL(25,33)IN models and is optional on DV(25,33,35)IN Models. If decorative door kits are to be installed on direct-vent insert, a lower louver panel kit must also be installed. The lower louver panel is shipped with the custom surround.

DV(L)(25,33,35)IN AND VF(L,P)(20,28)IN SERIES FIREPLACE INSERTS


HARDWARE PACKAGE (For Use With DV(L)(25,33,35)IN and VF(L,P)(20,28)IN



PLASTIC TOGGLE ANCHOR



SCREW




SCREW, MASONRY

DESCRIPTION	PART NUMBER	QUANTITY SUPPLIED
Plastic Toggle Anchor	R1996	2
Screw	R1134	2
Screw, Masonry	R2870	2
Wall Mounting Bracket	31275	1
Screw, Magnet	B101012	2
Magnet	R11280	1




SCREW, MAGNET



MAGNET




INCLUDED ON CUSTOM SURROUNDS
WHERE DECORATIVE DOOR KIT IS
INSTALLED
(DIRECT VENT FIREPLACE INSERTS ONLY)






WALL MOUNTING BRACKET

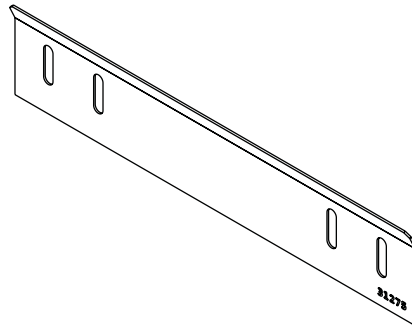

DV(L)(25,33,35)IN AND VF(L,P)(20,28)IN SERIES DECORATIVE FRONTS

Available accessories for DV(L)(25,33,35)IN **ONLY**.

Doors	Models & Finish Options
Tribecca 	DVD(25,33,35)C(BL,HP,SS) <ul style="list-style-type: none"> • Black • Hammered Pewter • Stainless Steel
Transom 	DVD(25,33,35)D(BL,HP,SS) <ul style="list-style-type: none"> • Black • Hammered Pewter • Stainless Steel
Horizon 	DVD(25,33,35)H(BL,HP,SS) <ul style="list-style-type: none"> • Black • Hammered Pewter • Stainless Steel

Decorative Front Kits	Model & Finish Options
Manhattan 	DVF(25,33,35)N(BL,HP) <ul style="list-style-type: none"> • Black • Hammered Pewter
Eclipse 	DVF(25,33,35)R(BL,HP,SS) <ul style="list-style-type: none"> • Black • Hammered Pewter • Stainless Steel
Float 	DVF(25,33,35)S(BL,HP,SS) <ul style="list-style-type: none"> • Black • Hammered Pewter • Stainless Steel
Jewel 	DVF(25,33,35)D(BL,HP,SS) <ul style="list-style-type: none"> • Black • Hammered Pewter • Stainless Steel
Lancaster 	DVF(25,33,35)H(BL,HP,SS) <ul style="list-style-type: none"> • Black • Hammered Pewter • Stainless Steel

DX(L,T)(30,35)IN SERIES FIREPLACE INSERTS

Installation of Custom Surround

1. Slide the side hooks onto the four pegs (two each side) on the firebox.

Custom Surround Installation without Optional Safety Screen Barrier



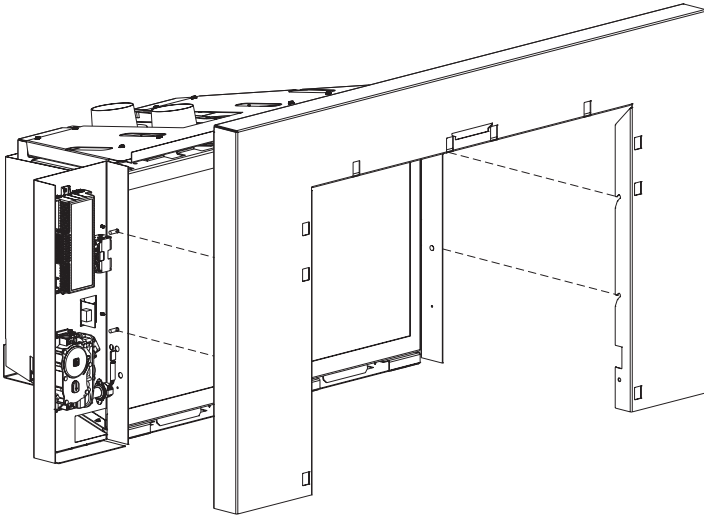


Figure 6


DX(L,T)(30,35)IN SERIES DECORATIVE FRONTS

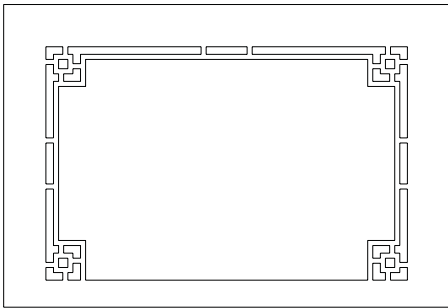


Veranda

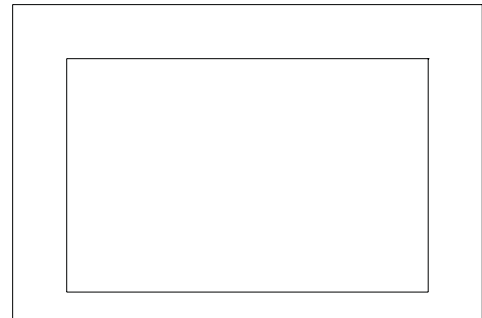

Accord

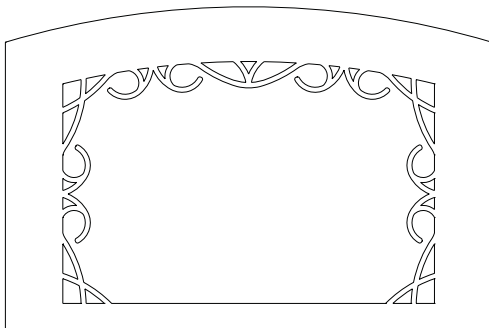


Lafayette

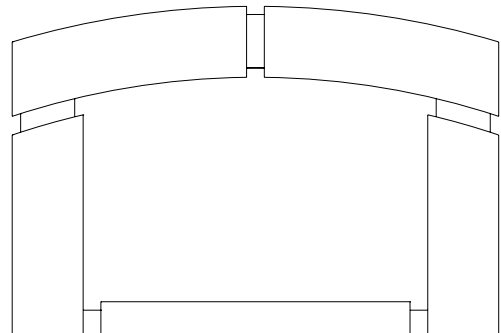

Dunes

DVC(20,26,28)IN SERIES FIREPLACE INSERTS

Secure the custom surround to the fireplace insert flanges with four (4) #8 x 1/2" truss head screws

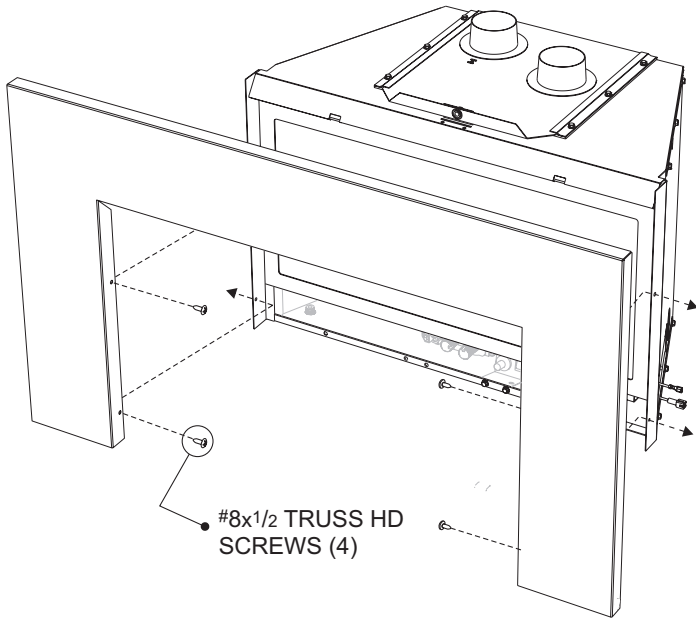



Empire Comfort Systems Inc.
Belleville, Illinois

If you have a general question
about our products, please e-mail
us at info@empirecomfort.com.

If you have a service or repair
question, please contact your dealer.

www.empirecomfort.com